

FSL LED FLOOD

Decorative Flood

FLOODLIGHTING

NEW



- Ultra-compact size measuring only 4.5" x 7.49" x 4.03"
- Wide flood NEMA 6 x 6 distribution for general purpose flood and facade lighting
- Traditional 1/2" x 14 NPS threaded adjustable knuckle mounting
- 120-277V operation (PC version 120V only)
- Rugged die-cast aluminum housing with dark bronze finish
- High impact UV stabilized acrylic outer lens protects LEDs and allows for cleaning and debris removal
- IP66, listed to UL1598 for use in wet locations
- Four color multi-language merchandising carton with application details
- Visor and vandal shield available
- Vented housing isolates LED module from driver maximizing product life and performance

ORDERING INFORMATION

Catalog Number	Mount	Beam Pattern	Wattage	Drive Current	Voltage	Color Temperature	Lumens	LPW	Weight lbs. (kg)
FSL-7	1/2" thread	Wide	26.5	1050mA	120-277V	5100K	2040	77	6 (2.7)
FSL-7-PC1	1/2" thread	Wide	26.5	1050mA	120V	5100K	2040	77	6 (2.7)


PERFORMANCE INFORMATION

Series Number	Equivalency			Delivered Lumens	System Watts	Lumens Per Watt	Max Candle Power	Beam Pattern	CCT	Voltage	Drivers/Current
	MH	HPS	CFL								
FSL-7	100w	100w	42w	2040	26.5	77	1450	Wide	5100K	120-277V	1@1050mA
FSL-7-PC1											

ACCESSORIES - Order Separately

Catalog Number	Description
FSL-SPC	Polycarbonate shield/lens (Replaces existing acrylic lens)
FSL-VISOR	Top/Bottom visor (Tap holes in lens frame for field installation)

DIMENSIONS

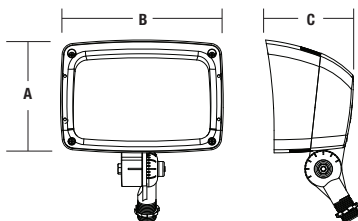

A	B	C
4.5"	7.49"	4.03"
114 mm	190 mm	102 mm