

Laredo LMC-30LU LED

Medium-Size Wallpack

Laredo 30 LED medium size wallpack offers both wide spacing and excellent uniformity. The 30 LED unit is available in lumen packages ideal for mounting heights from 12 to 18 feet; providing spacings of up to five times the mounting height. The 30 LED unit is available in a wide Type III or forward throw Type IV beam.

The fixture is constructed of durable die-cast aluminum housing and door. The Laredo features a quick-mount adapter that allows installation without ever opening the fixture. Save on installation time, fixture maintenance and energy!

LMC-30LU Egress Wallpack:

Designed to meet strict 1fc minimum requirements. At 12ft mounting height 1fc covers 16x16ft area, well beyond the 10x10ft standard. 44w - 350mA drives 30LEDs at 3500 lumens at full power/ 2046 average lumens in battery mode. Outer clear impact resistant glass lens protects LED lenses. No uplight, external test button quick mount, wet location listed.

APPLICATIONS

Full cut-off, IDA compliant. Listed to UL1598 for use in wet locations when mounted aimed down and UL certified for thru-wiring.



ORDERING INFORMATION - STANDARD CONFIGURATIONS

LMC	-		-		-		-		-	
SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	DRIVE CURRENT	FINISH	OPTIONS				
LMC Laredo Medium Cut-off	30LU 30 LEDs, Universal voltage 120-277V 30LF 30 LEDs, 347V	4K 4000K nominal 5K 5000K nominal	3 ^{1,3} Type III 4 ^{1,3} Type IV	BLANK Std. is 700mA 71w 035 ³ 350mA 35w	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	PC(X) ² Photocontrol WIH In fixture wireless control module, pg. 381				

ACCESSORIES - Order Separately

Catalog Number	Description
LMC-SPC	Polycarbonate shield
PBT-1	120V button photocontrol
PBT-234	208/240/277V button photocontrol


- Standard 700MA Type III distribution produces 6023 lumens, Type IV 5593 lumens at 71w
- PC(X) Replace X with 1-120V, 2-208V, 3-240V, 4-277V
- 350mA drive current produces 2000-3500 lumens at 35watts

ORDERING INFORMATION - EGRESS LAREDO LMC

LMC	-	30LU	-		-	3	-	035	-		-	
SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	DRIVE CURRENT	FINISH	OPTIONS						
LMC Laredo Medium Cut-off	30LU 30 LEDs, up to 3500 lumens, 44w input, Universal voltage 120-277V 30LF 30 LEDs, up to 3500 lumens, 44w input, Universal voltage 347V	4K 4000K nominal 5K 5000K nominal	3 Type III	035 350mA 44w	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	BBU277 Intergral battery for 120-277V, rated for -20° C ambient BOC277 Intergral battery for 120-277V, rated for 0° C ambient PC(X) ² Photocontrol						



LMC-30LU BBU/BOC

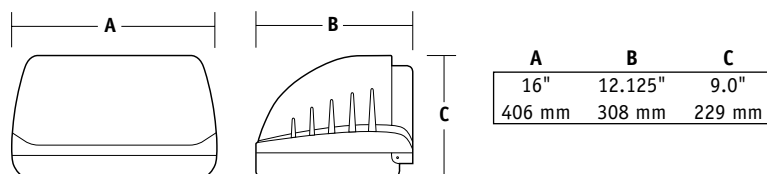

Outdoor Lighting