

# Laredo LNC2

## Compact LED Wallpack

The compact Laredo LED LNC2 is designed for perimeter illumination for safety, security and identity. Slightly larger than the LNC, the Laredo LNC2 has greater lumens and increased performance. The LNC2 achieves up to 85% energy savings over traditional metal halide. This compact fixture has no uplight and is neighbor friendly with typical mounting height up to 15 feet and 60ft fixture spacing (without acrylic diffuser) and 40ft spacing with acrylic diffuser installed. Fixtures have protective polyester finish in four color choices.

### APPLICATIONS

Zero uplight, IDA compliant entry/perimeter lighting. Listed to UL1598 for use in wet locations. Features long-life (60,000hr L96 rated), high CRI, 3000K, 4200K, and 5100K LEDs. Single SKU designed for both recessed box or surface conduit wiring, includes quick-mount adapter for ease of installation. DesignLights Consortium (DLC) listed. Acrylic diffuser softens high angle output for use at entrances or pedestrian pathways.

- IES Progress Award Winner - 2013



WALLPACKS



### ORDERING INFORMATION

LNC2						
SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	FINISH	OPTIONS	
<b>LNC2</b> Laredo LNC2	<b>12LU</b> 12 LEDs, Universal voltage 120-277V <b>18LU<sup>2</sup></b> 18 LEDs, Universal voltage 120-277V	<b>3K</b> 3000K nominal 80 CRI <b>4K</b> 4200K nominal 70 CRI <b>5K</b> 5100K nominal 67 CRI <b>AM<sup>2</sup></b> Amber (590 μm available for "Turtle Friendly"/observatory applications, 350mA; consult factory	<b>3</b> Type III <b>4</b> Type IV	<b>1</b> Bronze <b>2</b> Black <b>3</b> Gray <b>4</b> White <b>5</b> Platinum	<b>PC(X)<sup>1</sup></b> Button photo-control, replace X with voltage, specify 1-120V, 2-208V, 3-240V, 4-277V	


<sup>1</sup> When PC is ordered, input must match PC voltage

<sup>2</sup> Amber LEDs only available on 18LU configurations, 350 mA only. Universal Voltage 120V-277V

### PERFORMANCE INFORMATION

Series Number	Equivalency			Delivered Lumens	System Watts	Lumens Per Watt	Mounting Height	CCT	Voltage	Drivers/Current
	MH	HPS	CFL							
 <b>LNC2-12LU-5K-3-1</b>	150w	150w	2x42w	2,420	28.6	85	Up to 15 ft.	5100K	120-277V	1@700mA
 <b>LNC2-18LU-5K-3-1</b>	250w	250w	2x42w	3,311	42.3	78	Up to 15 ft.	5100K	120-277V	2@700mA

### DIMENSIONS

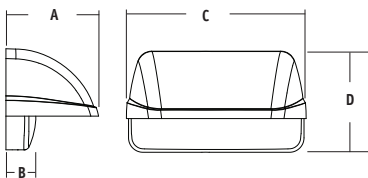

A	B	C	D	Weight
6.25"	1.6"	10.25"	5.6"	7.0 lbs.
158.7 mm	40.2 mm	260.4 mm	142.2 mm	3.2 kg